




Brute[®] 9800 Printer/Applicator

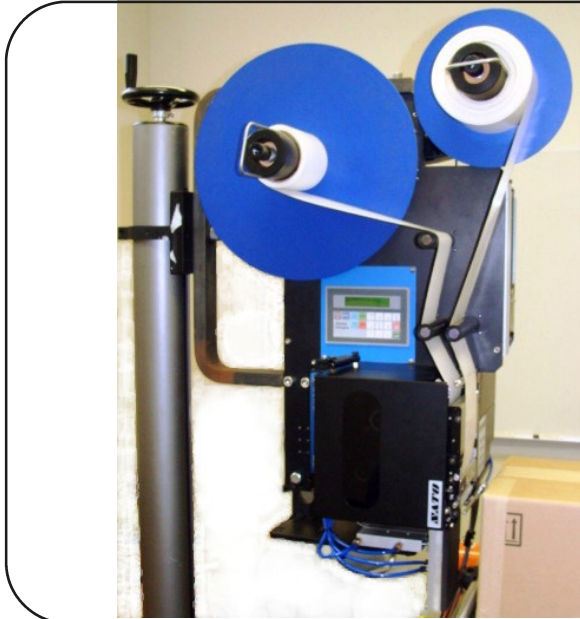

The rugged **Brute[®] 9800** combines the flexibility of thermal transfer printing with an assortment of label applicator options, including tamp, tamp-blow, tilt-on and corner wrap.

Available as a stand-alone printer applicator or integrated with a product conveying system, the **Brute[®] 9800** may be equipped with Zebra, Sato, Datamax, Intermec, or Avery print engines.

Features

Heavy duty aluminum construction
Powered waste rewinder
Jam-free waste rewinder
Easily adjustable supply roll tension clutch
Easily accessible components

Interchangeable applicators (tamp, vacuum blow, corner wrap)
Universal mounting arm
Quick change print engine
User friendly electronic controls with programmable presets

Options:

- Zebra, Sato, Avery, Intermec or Datamax print engines
- Out-of-label and low-label sensors
- Right or left handed configuration
- T-stand with locking casters
- **Energy Saver** compressed air shut-off
- VisuaLabel™ synchronized touchscreen controls

Specifications:

- **Supply roll size: 12" O.D.**
- **Core size: 3" I.D**
- Dimensions: 22"H x 32"l x 18"D
- Power requirements: 120 VAC
- Air requirements: 40-80 PSI, 1-2 CFM
- Universal mounting arm